
# Enclosure series aluTWIN

Type: AT 100

Material-No.: 104.100.000



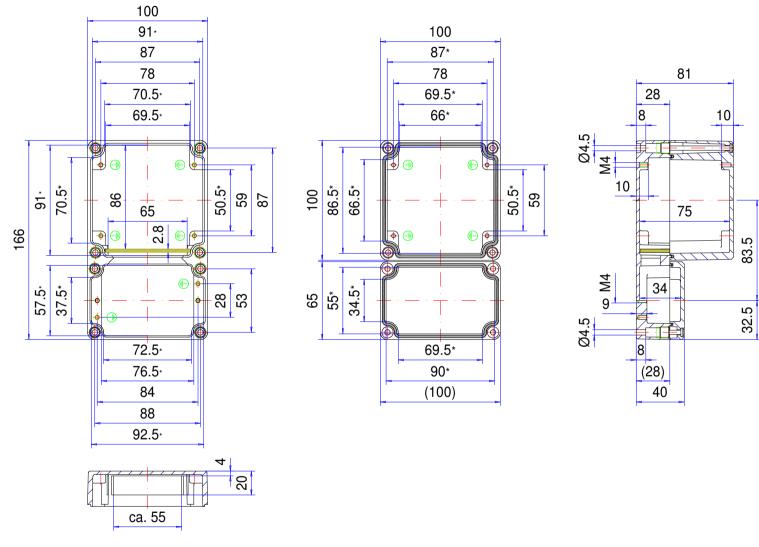

<sup>\*</sup> Please note: Mould slope for casting ejection, dimensions in the amount of the bottom!

Enclosure material	GD-AI Si 12 (DIN 1725)		Weight	770 g
Lid screws	8x stainless steel 1.4567 (V2A), captive		Earthing screws	6x M4x6, copper-plated
Gasket	2x TPE moulded gasket, silicone-free, black	- "	Coating	Powder coating RAL 7040, window grey + RAL 7035, light grey
Ingress protection	IP66 EN 60529		Tolerance	GTA 13/5 DIN 1688-4 (outside dimensions ±0,5mm)



# 104.100.000 aluTWIN AT 100



Product overview		
Material	Aluminum	
Color	RAL 7040, RAL 7035	
Length (L)	6.54 inch	
Width (W)	3.94 inch	
Height (H)	3.19 inch	
Weight (g)	770 g	



#### aluTWIN

#### THE TWO-CHAMBER ENCLOSURE

IP 66, Optional: IP 67

## The key product features:

- · Enclosure material: diecast aluminium
- Enclosure surface: lid powder coating, RAL 7040, bottom powder coating, RAL 7035
- · Design with equally high covers
- Secure connection technology due series terminals in a connection space opened separately
- Chambers can be separated by isolation wall
- Lid screws in stainless steel 1.4567
- Enclosure seal: TPE molded gasket, silicone-free, connection space: O-ring gasket (CR)

---

aluTWIN is a range of high-performance dual-chamber diecast aluminum enclosures for heavy duty electronics and electrical equipment.

The design offers the option of installing the electronics and terminals in separate sections to protect them from each other during installation and servicing. The enclosures are based on our aluNORM product range and are weatherproof and watertight to IP 66. Threaded screw bosses are provided inside for fitting circuit boards, mounting plates etc.

We can supply aluTWIN enclosures fully customized to your requirements.

#### **Enclosure sizes**

4

#### Additional info

Secure connection technology due to the printed circuit boards or series terminals in connection spaces that can be opened separately

Both chambers can be separated with the isolation wall included

Different lid variants

Specially developed external mounting brackets made from die-cast aluminum

#### **Enclosure**

Diecast aluminum alloy

EN AN-44300 DIN EN 1706

(GD AI Si 12/DIN 1725)

1° mold slope for casting ejection > internal circumference dimensions decrease by 1° towards enclosure bottom.

# **Fastening**

Space-saving single-channel technology for lid and fastening screws outside of the enclosure inte-rior



# Internal mounting

Fastening thread in lateral bars on the enclosure base.

# Ingress protection

IP 66 / EN 60529 Optional: IP 67

# Gasket

Chloroprene O-ring gasket (CR) or TPE molded gasket, silicone-free Optional: Silicone gasket

## Lid screws

Stainless steel 1.4567, captive

## Surface

Powder coating

Bottom: RAL 7035, light gray Lid: RAL 7040, window gray Optional: Special colors

Optional: Corrosion protection

# Customizing

Learn more about our full customizing service for installation-ready enclosures

# **Full-Service-Products**

Customization according to your wishes.





Everything begins with individual advice. We'll be pleased to support you with your project and find solutions for every requirement. Customer-specific solutions are our speciality.



Test our products with your internal mounting. We'll be pleased to send you a sample enclosure for inspection with no strings attached.



We'll manufacture every enclosure for you according to your exact specifications - whether they involve precise drilling or large tolerance.



Thanks to our modern CNC production, we can quickly and efficiently mill custom-fit cut-outs and contours to match your exact specifications.



Our services also include engraving your logo and other elements, which we can of course perform in any colour you desire.



We can process stainless steel enclosures and plates quickly and reliably according to your individual requirements thanks to our in-house lasering centre.



We can powder coat enclosures, command enclosures and suspension systems in any RAL colour you desire. Custom colours are of course also possible.



We can also paint all our enclosures in any RAL colour you desire. The application of primer and special colour structures are possible, as well.



If desired, we can apply your logo and lettering or other markings using serigraph printing.



Digital printing is particularly worthwhile for low-volume orders and for realising complex parterns or images.



We offer our conFORM low-price standard EMC enclosure to protect your internal mounting against electromagnetic radiation. On request, we can also supply an EMC-compliant version of any other ROLEC enclosure.



We are able to offer the right made-tomeasure display for all our enclosures - in varying sizes and degrees of robustness depending on the application.



ROLEC's portfolio also includes matching front plates, mounting plate, supporting rails and terminal blocks as well as a range of cable glands, blanking plugs etc.



Would you like to have all your components supplied already assembled?
No problem. Our assembly team will be pleased to perform all assembly work on your behalf.

If you have any requirements for services not listed here, please ask us. Customer-specific solutions are our speciality. We also are keen to take on unusual tasks.

We will help you with those challenges that many others

Our Service

would give up on.