

**106.234.000**  
**aluKOM AK 234**



**technical data**

Material	Aluminum
Protection class	IP 66/EN 60529
Colour	RAL 7032 RAL 7032
Length	15.748"   400 mm
Width	9.055"   230 mm
Height	4.331"   110 mm
Weight (g)	4880 g
Country of manufacture	Germany
Customs tariff number	76169910

## aluKOM

CLASSIC, INDUSTRY STANDARD DIECAST ALUMINUM ENCLOSURES FOR INDUSTRIAL EQUIPMENT

### IP 66 The key product features:

- Enclosure material: Die-cast aluminium
- Enclosure surface: powder coating, RAL 7032
- External mounting
- Lid support
- Hold hinge
- Exterior hinge
- Compatible with standard enclosures available on the market, therefore easy to exchange
- Lid screws in stainless steel 1.4567
- Ingress protection IP 66
- Enclosure seal: TPE moulded gasket, silicone-free, O-ring gasket (CR)

---

aluKOM is a watertight IP66 enclosure made from diecast aluminum which has gone on to become the global standard since its introduction. Originally developed as a terminal enclosure, it is ideal for mounting all types of electronic and electrical components.

The large range of sizes is suitable for many different applications. aluKOM is also available with an RFI/EMI shielded gasket. Threaded screw bosses are provided in the base for fitting circuit boards, terminal rails, mounting plates etc. Compatible cable glands and accessories are also available.

We can supply aluKOM enclosures fully customized to your requirements.

Enclosure sizes  
24

Additional info  
Compatible with available standard products

Wide variety of accessories

Optional: EMC model also available

Enclosure  
Die-cast aluminum

EN AC 44300/EN AC-44200 (DIN EN 1706)

1° mold slope for casting ejection > internal circumference dimensions decrease by 1° towards enclosure bottom.

Fastening  
Separate screw channels, fastening brackets available as accessories

Internal mounting  
M4/M6 fastening thread in lateral bars on the enclosure base

Ingress protection  
IP 66 / EN 60529

Gasket  
Chloroprene O-ring gasket (CR)  
or: TPE molded gasket, silicone-free  
Optional: Silicone gasket

Lid screws  
Stainless steel 1.4567, captive


Surface  
Powder coating, pebble gray RAL 7032  
Optional: Special colors  
Optional: Corrosion protection

Customizing  
Learn more about our full customizing service for installation-ready enclosures

# Enclosure series aluKOM

Type: AK 234

Material-No.: 106.234.000

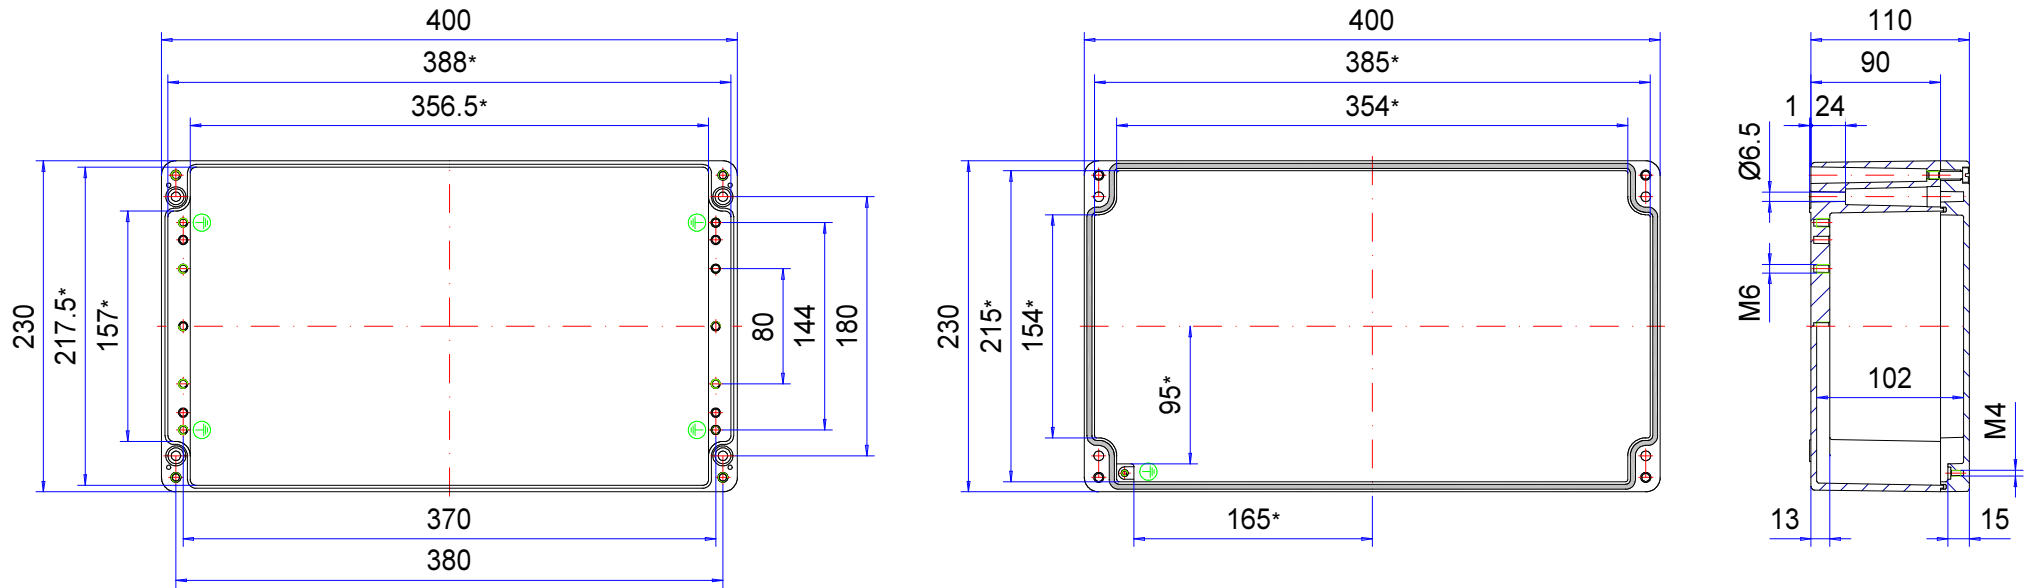

\* Please note: Mould slope for casting ejection, dimensions in the amount of the bottom!

Enclosure material	GD-AI Si 12 (DIN 1725)		Weight	4.880 g
Lid screws	4x stainless steel 1.4567 (V2A), captive		Earthing screws	4x M6x8, copper-plated
Gasket	Dosed, PUR		Coating	Powder coating RAL 7032, pebble grey
Ingress protection	IP66 EN 60529		Tolerance	GTA 13/5 DIN 1688-4 (outside dimensions ±0,5mm)