
Enclosure series aluKOM

Type: AK 120

Material-No.: 106.120.000



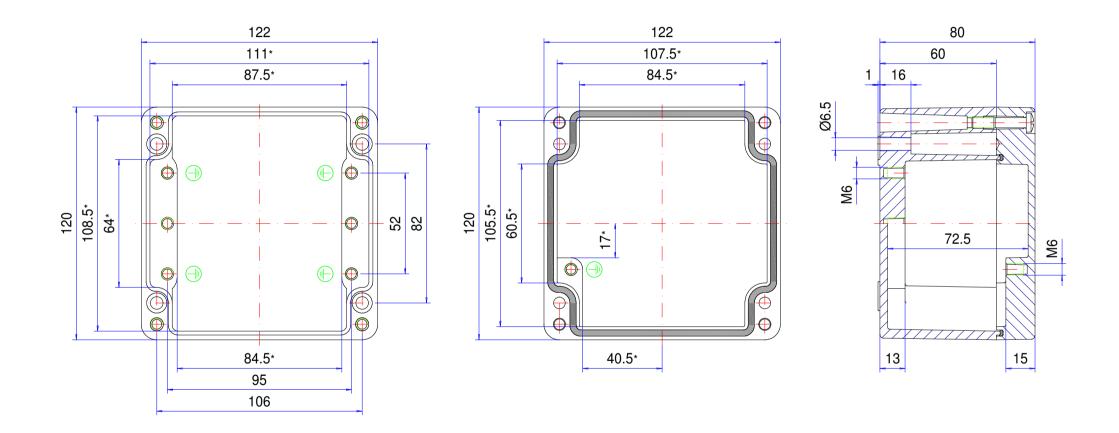

^{*} Please note: Mould slope for casting ejection, dimensions in the amount of the bottom!

| Enclosure material | GD-Al Si 12 (DIN 1725) | Weight | 950 g |
|--------------------|---|-----------------|---|
| Lid screws | 4x stainless steel 1.4567 (V2A), captive | Earthing screws | 4x M6x9, copper-plated |
| Gasket | 1x TPE moulded gasket, silicone-free, black | Coating | Powder coating RAL 7032, pebble grey |
| Ingress protection | IP66 EN 60529 | Tolerance | GTA 13/5 DIN 1688-4 (outside dimensions ±0,5mm) |



106.120.000 aluKOM AK 120



| Product overview | | |
|------------------|----------------|--|
| Material | Aluminum | |
| Protection Class | IP 66/EN 60529 | |
| Color | RAL 7032 | |
| Length (L) | 4.8 inch | |
| Width (W) | 4.72 inch | |
| Height (H) | 3.15 inch | |
| Weight (g) | 950 g | |



aluKOM

THE CLASSIC STANDARD TERMINAL ENCLOSURE

IP 66

The key product features:

- · Enclosure material: diecast aluminium
- Enclosure surface: powder coating, RAL 7032
- · Compatible with standard enclosures available on the market, therefore easy to exchange
- · Lid screws in stainless steel 1.4567
- Enclosure seal: TPE moulded gasket, PUR

aluKOM is a watertight IP66 enclosure made from diecast aluminum which has gone on to become the global standard since its introduction. Originally developed as a terminal enclosure, it is ideal for mounting all types of electronic and electrical components.

The large range of sizes is suitable for many different applications. aluKOM is also available with an RFI/EMI shielded gasket. Threaded screw bosses are provided in the base for fitting circuit boards, terminal rails, mounting plates etc. Compatible cable glands and accessories are also available.

We can supply aluKOM enclosures fully customized to your requirements.

Enclosure sizes

24

Additional info

Compatible with available standard products

Wide variety of accessories

Optional: EMC model also available

Enclosure

Die-cast aluminum

EN AC 44300/EN AC-44200 (DIN EN 1706)

1° mold slope for casting ejection > internal circumference dimensions decrease by 1° towards enclosure bottom.

Fastening

Separate screw channels, fastening brackets available as accessories

Internal mounting

M4/M6 fastening thread in lateral bars on the enclosure base

Ingress protection

IP 66 / EN 60529



Gasket

Chloroprene O-ring gasket (CR) or: TPE molded gasket, silicone-free Optional: Silicone gasket

Lid screws

Stainless steel 1.4567, captive

Surface

Powder coating, pebble gray RAL 7032

Optional: Special colors

Optional: Corrosion protection

Customizing

Learn more about our full customizing service for installation-ready enclosures

Full-Service-Products

Customization according to your wishes.





Everything begins with individual advice. We'll be pleased to support you with your project and find solutions for every requirement. Customer-specific solutions are our speciality.



Test our products with your internal mounting. We'll be pleased to send you a sample enclosure for inspection with no strings attached.



We'll manufacture every enclosure for you according to your exact specifications - whether they involve precise drilling or large tolerance.



Thanks to our modern CNC production, we can quickly and efficiently mill custom-fit cut-outs and contours to match your exact specifications.



Our services also include engraving your logo and other elements, which we can of course perform in any colour you desire.



We can process stainless steel enclosures and plates quickly and reliably according to your individual requirements thanks to our in-house lasering centre.



We can powder coat enclosures, command enclosures and suspension systems in any RAL colour you desire. Custom colours are of course also possible.



We can also paint all our enclosures in any RAL colour you desire. The application of primer and special colour structures are possible, as well.



If desired, we can apply your logo and lettering or other markings using serigraph printing.



Digital printing is particularly worthwhile for low-volume orders and for realising complex parterns or images.



We offer our conFORM low-price standard EMC enclosure to protect your internal mounting against electromagnetic radiation. On request, we can also supply an EMC-compliant version of any other ROLEC enclosure.



We are able to offer the right made-tomeasure display for all our enclosures - in varying sizes and degrees of robustness depending on the application.



ROLEC's portfolio also includes matching front plates, mounting plate, supporting rails and terminal blocks as well as a range of cable glands, blanking plugs etc.



Would you like to have all your components supplied already assembled?
No problem. Our assembly team will be pleased to perform all assembly work on your behalf.

If you have any requirements for services not listed here, please ask us. Customer-specific solutions are our speciality. We also are keen to take on unusual tasks.

We will help you with those challenges that many others

Our Service

would give up on.